



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**HV angle valve**  
**Series 264, DN 100 (ID 4'')**  
**Ordering No. 26440-QA21-0001**

### Description

Flange	ISO-K 100
Actuator	Pneumatic, single acting with closing spring – without solenoid valve – with position indicator
Feedthrough	Bellows

### Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls <sup>-1</sup> $< 1 \cdot 10^{-9}$ mbar ls <sup>-1</sup>
Pressure range		$1 \cdot 10^{-8}$ mbar to 2 bar (abs)
Differential pressure on the plate	– In opening direction – In closing direction	$\leq 1.2$ bar $\leq 2$ bar
Differential pressure at opening		$\leq 1$ bar [1 bar with reduced number of cycles]
Conductance (molecular flow)		440 ls <sup>-1</sup>
Actuation time	– Closing – Opening	$\leq 1$ sec. $\leq 1$ sec.
Cycles until first service (tested at room temp. under clean and static vacuum conditions)		1 million
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Position indicator	$\leq 150$ °C $\leq 120$ °C $\leq 80$ °C
Material	– Valve body – Actuator – Plate – Bellows	Aluminum (EN AC-42000) Aluminum AISI 316L (1.4404) AISI 316 Ti (1.4571)
Seal	– Bonnet O-ring – Plate O-ring – Actuator O-ring	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Weight		9 kg / 20 lbs
Mounting position		any
Volume of pneumatic actuator		0.3 l / 0.01 ft <sup>3</sup>
Compressed air min. – max. overpressure		4.5 – 7 bar / 65 – 102 psi
Compressed air connection		1/8" ISO/NPT female
Behavior in case of compressed air pressure drop	– Valve closed – Valve opened – During actuation	Valve remains closed and leaktight Valve closes leaktight Valve closes leaktight

Created by: LIN	Release date: 08.02.2013	1/2
Modified by:	Release date:	<b>600082EA</b>



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

### HV angle valve

**Series 264, DN 100 (ID 4'')**

**Ordering No. 26440-QA21-0001**

Behavior in case of power failure


- Valve closed
- Valve opened
- During actuation

Valve remains closed and leaktight  
Depending on customer installation  
Depending on customer installation

### Electrical connection

#### Position indicator

Type: Micro switch  
Voltage: ≤ 50 V AC / DC  
Current: 5...100 mA  
Short circuit protected: No  
Connection: cable, 4 wire  
Cable length: 500 mm  
Wire cross section: 0.25 mm<sup>2</sup>

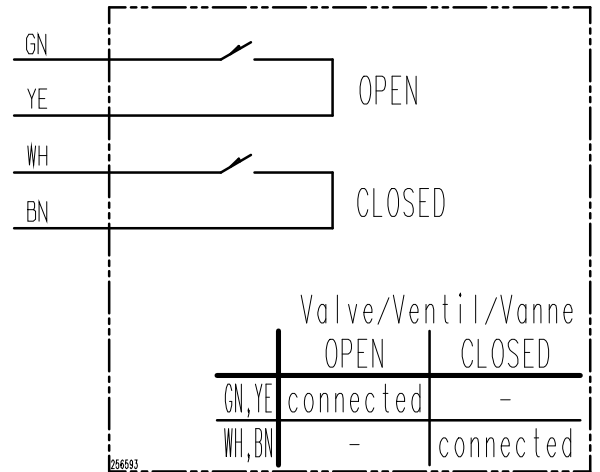

Wiring diagram

Created by: LIN	Release date: 08.02.2013	2/2
Modified by:	Release date:	<b>600082EA</b>